



# Cat.5e RJ-45 Jack (UTP)



## Dimensions : m/m

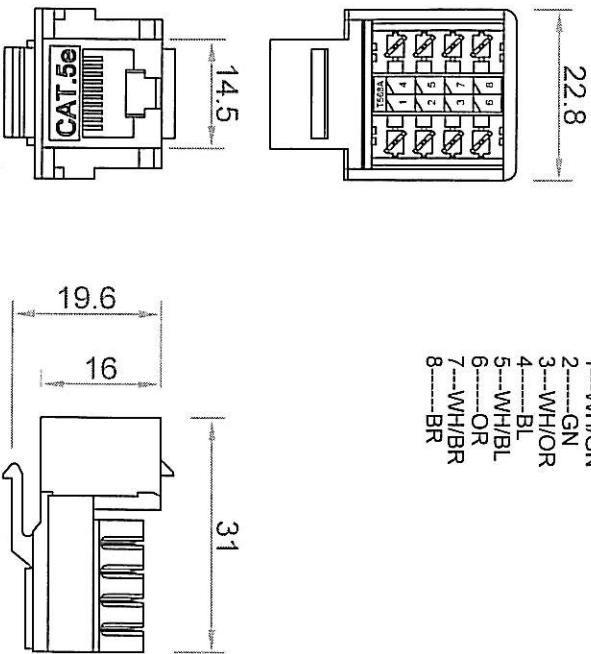

- Color coding information  
T568A:
- 1---WH/GN
  - 2---GN
  - 3---WH/OR
  - 4---BL
  - 5---WH/BL
  - 6---OR
  - 7---WH/BR
  - 8---BR

Printed Letter :  
Printed Letter:(Blue Ink)



## Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard.

## Materials:

- Plastic Body : Fireproof ABS UL-94V0
- RJ-45 Jack : 8P8C 50 micro inches gold plated
- PCB : FR-4 / 1.0mm UL-94V0
- IDC Body : Fireproof ABS UL-94V0
- IDC Pin : Bronze & Tinned

Label Color Code: T568 A

IDC Description: For 22-26 AWG.

For 110 or Krone punch-down Tool

## Electrical Specifications:

- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps.
- DC Resistance : 0.1 ohm (max.)
- Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

## Mechanical Specifications:

- IDC Punch Down Cycle : Over 250 Cycles (min.)
- RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

DRAWN NO:		ITEM NO:	DA100
UNIT:	APPR	CUSTOMER:	
m/m	G.O.	DATE:	
SCALE:	CHECK	TOLERANCE:	· ± 1 · X ± 0.1 · XX ± 0.15
	DESIGN		

**AMDEX**