
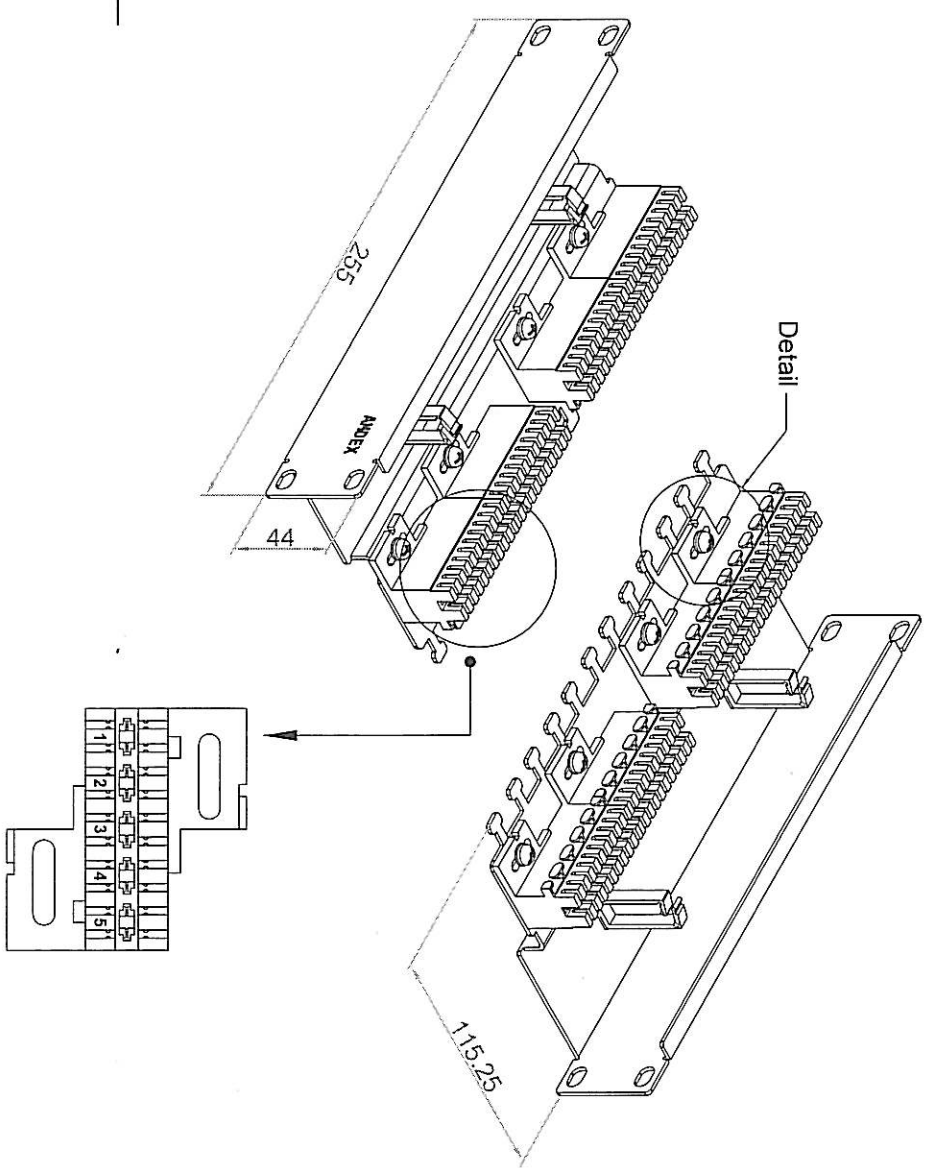


# 10" 20 Pair Shelf W / H Disconnection Module

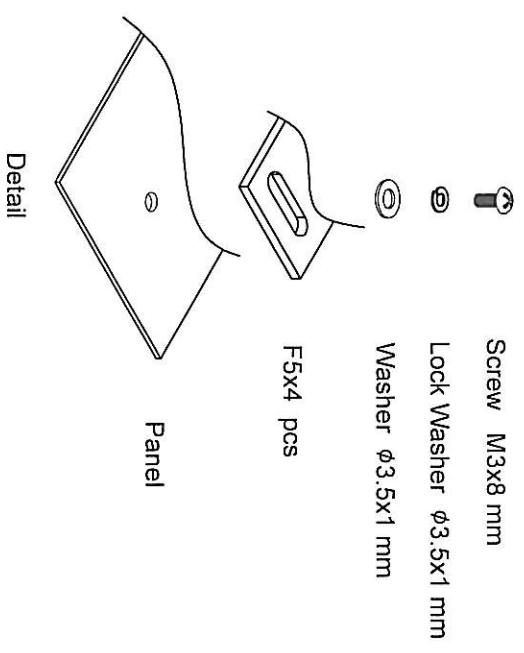

**Performance :**

Meets Cat.3 Standard.

**Materials :**

Metallic Panel : SECC. Thickness = 1.6 mm

Disconnection Module : ABS or PBT

Contact Pin : Phosphor Bronze 19~27 Micro Inches Silver plating

Cable Fix Ring : Nylon

**Electrical Specifications:**

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps.

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

**Mechanical Specifications:**

Punch Down Cycle : Over 500 Cycles (min.)

Operation Temperature : -40 ~ +70 degrees / C

DRAW NO:	APPR	G.O.	ITEM NO:	DA10-20
UNIT: mm	CHECK		CUSTOMER:	
SCALE:	DESIGN		DATE:	
			TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15