


Cat.6 8Port 10" Patch Panel (UTP) / Krone Type

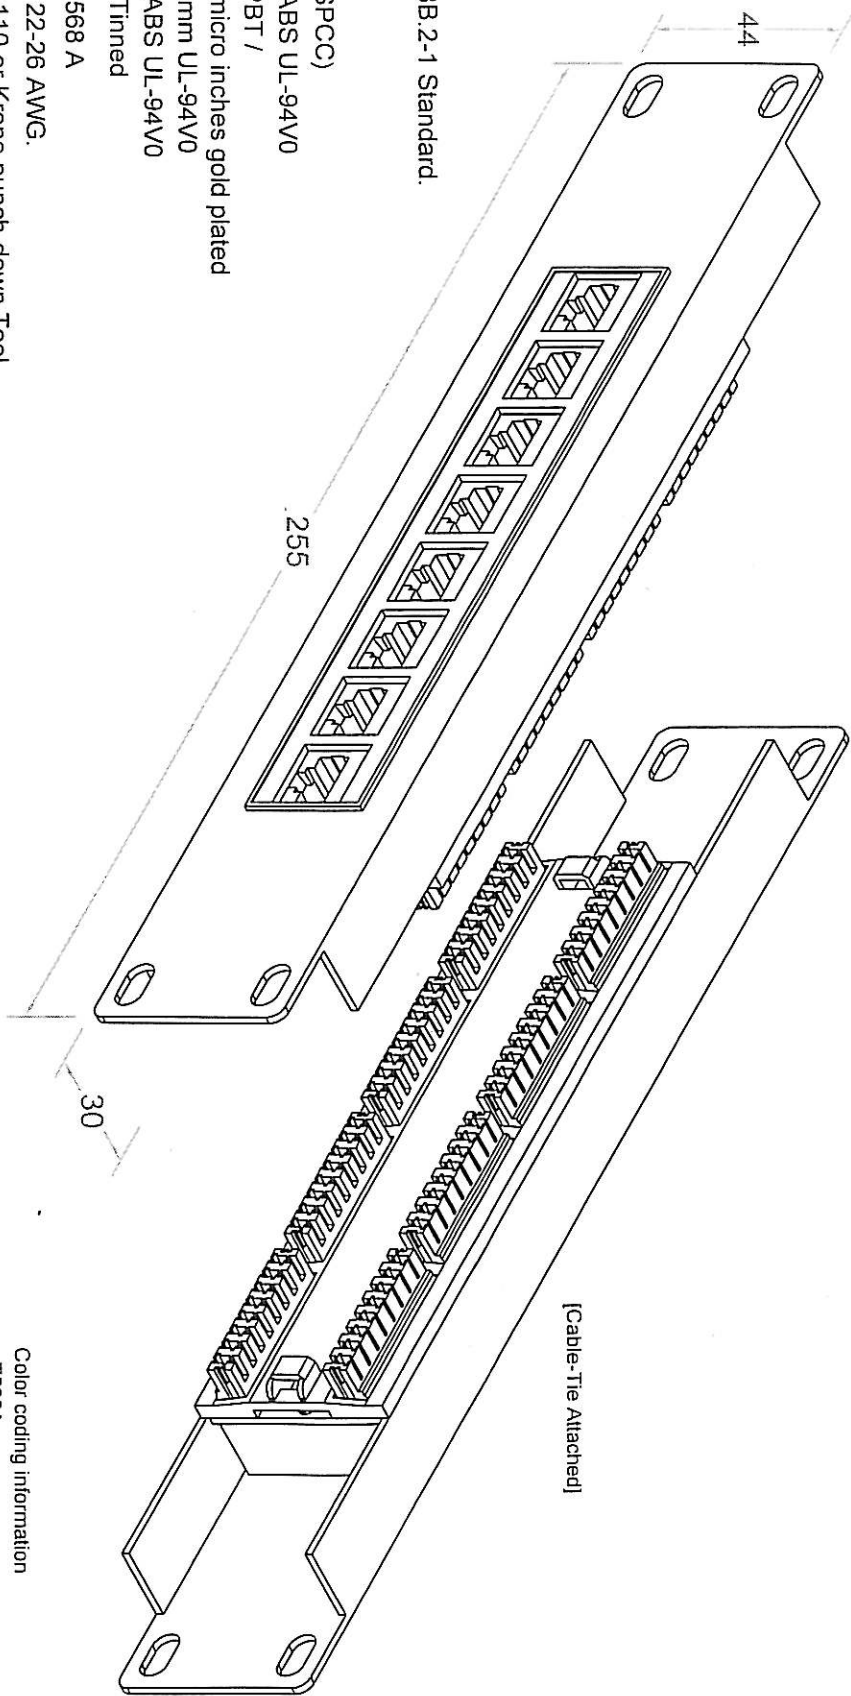

[Cable-Tie Attached]

Performance:

Meets Cat.6 EIA/TIA 568B.2-1 Standard.

Materials:

- Panel : Metallic Panel (SPCC)
- Plastic Body : Fireproof ABS UL-94V0
- RJ-45 Jack : Housing-PBT / 8P8C 50 micro inches gold plated
- PCB : FR-4 / 1.6mm UL-94V0
- IDC Body : Fireproof ABS UL-94V0
- IDC Pin : Bronze & Tinned
- Label Color Code : T568 A
- IDC Description : For 22-26 AWG.

For 110 or Krone punch-down Tool

Electrical Specifications:

- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps.
- DC Resistance : 0.1 ohm (max.)
- Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

- IDC Punch Down Cycle : Over 250 Cycles (min.)
- RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)
- Operation Temperature : -40 ~ +70 degree / C

Marking:

Printed Letter:

Cat.6



AMDEX

N3674

Color coding information

- T568A:
- 1---WH/GN
- 2---GN
- 3---WH/OR
- 4---BL
- 5---WH/BL
- 6---OR
- 7---WH/BR
- 8---BR

DRAW NO:	APPR	G.O.	ITEM NO:	DA10-8P-C6
UNIT: m/m	CHECK		CUSTOMER:	
SCALE:	DESIGN		DATE:	
			TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15