

CAT.5e 100 BASE-T T-MOD ADAPTER

Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard.

Materials:


- Plastic Body : Fireproof ABS UL-94V0/White color
- RJ-45 Jack : 8P8C 50 micro inches gold plated
- PCB : FR-4 / 1.6mm / UL-94V0
- IDC Body : Fireproof ABS UL-94V0
- IDC Pin : Bronze & Tinned
- Plug : 8P8C 50 micro inches gold plated / UL 94V-2
- Cable : Cat.5e UTP

Electrical Specifications:


- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps .
- DC Resistance : 0.1 ohm (max.)
- Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

- RJ-45 Jack Insertion Cycle : Over 1000 Cycles (min.)
- Plug Insertion Cycle : Up 1000 times
- Plug Tensile : 18 lb(min.)

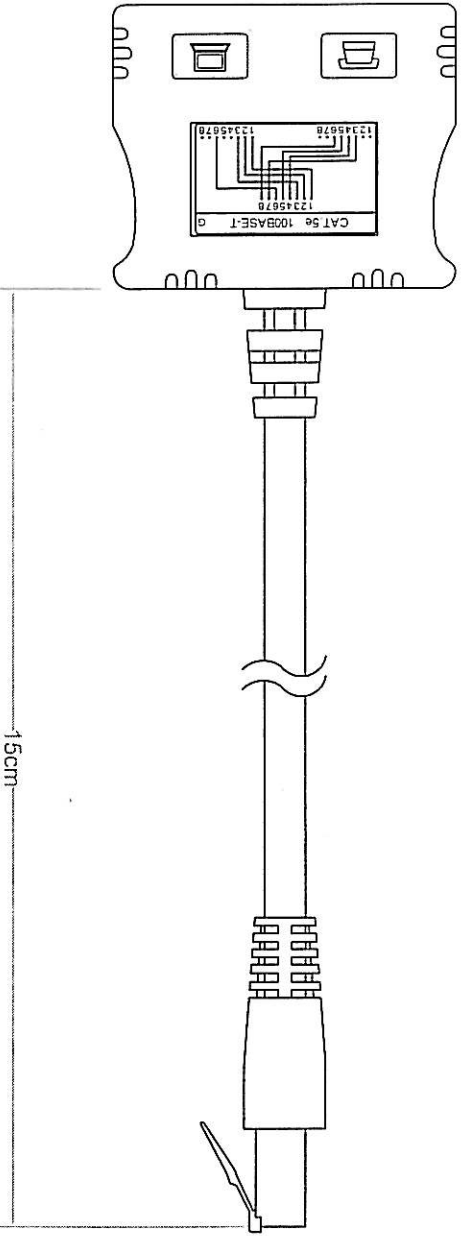

WIRING DIAGRAM

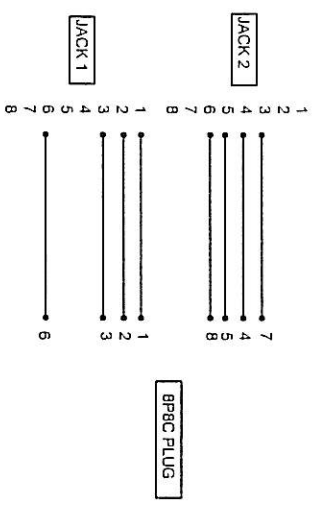

Packing:

- 1 pcs / bag / DASPLIT2 Label
- 25pcs/large bag

Operation Temperature : -40 ~ +70 degree / C

| | | |
|-----------|------------|-----------------------------|
| DRAWN NO: | ITEM NO: | DASPLIT2 |
| APPR | CUSTOMER: | |
| CHECK | DATE: | |
| DESIGN | TOLERANCE: | · ± 1 · X ± 0.2 · XX ± 0.15 |
| UNIT: m/m | | |
| SCALE: | | |