



Cat.3 RJ-45 Jack 8P4C



Materials:

Plastic Body : Fireproof ABS UL-94V0
 RJ-45 Jack : 8P4C 15 micro inches gold plated
 PCB : FR-4 / 1.0mm
 IDC Body : Fireproof ABS UL-94V0
 IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.

For 110 or Krone punch-down Tool



Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
 Contact Resistance : 20m ohms (max.)
 Current Rating : 1.5 Amps.
 DC Resistance : 0.1 ohm (max.)
 Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)
 RJ-45 Jack Insertion Cycle : Over 1000 Cycles (min.)
 Operation Temperature : -40 ~ +70 degree / C

Dimensions:





RJ-45:8P4C

IDC Block:

Wire Map:

Printed Letter :

Printed Letter:(Blue Ink)
 Cat.3

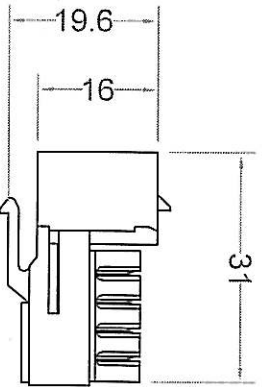

DRAW NO:		ITEM NO:	DT101
UNIT:	APPR	CUSTOMER:	
SCALE:	CHECK	DATE:	
	DESIGN	TOLERANCE:	· ± 1 · X ± 0.1 · XX ± 0.15

AMDEX