
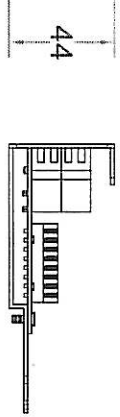
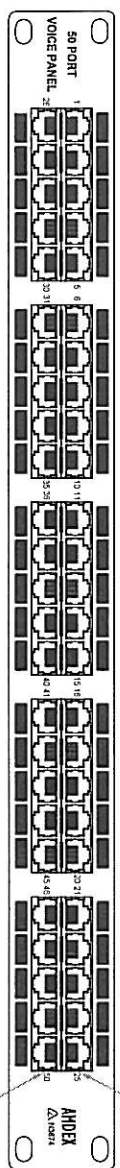
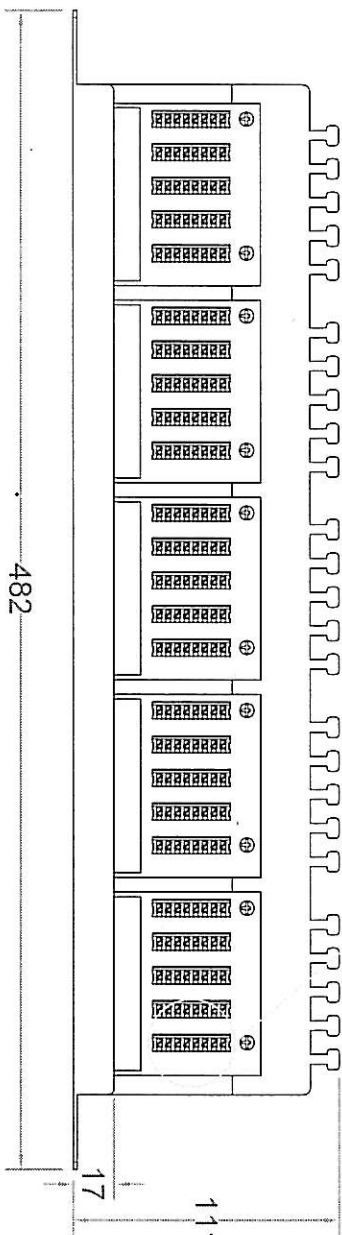


# 50 Ports ISDN Patch Panel



**Materials :**

- Bottom Panel : Metallic Panel (SPCC)
- RJ-45 Jack : Housing-PBT / 8P8C 6 micro inches gold plated /
- PCB : FR-4 / 1.6mm UL-94V0
- IDC Body : Fireproof ABS UL-94V0
- IDC Pin : Bronze & Tinned

**IDC Description : For 22-26 AWG.**

For 110 or Krone punch-down Tool

**Electrical Specifications:**

- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps .
- DC Resistance : 0.1 ohm (max.)
- Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

**Mechanical Specifications:**

- IDC Punch Down Cycle : Over 250 Cycles (min.)
- RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)
- Operation Temperature : -40 ~ +70 degree / C

DRAW NO.:	APPR	G.O.	ITEM NO.:	DTP50
UNIT: m/m	CHECK		CUSTOMER:	
SCALE:	DESIGN		DATE:	
			TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15